



STANDARD SAFETY SYSTEMS

• OPTICAL BARRIERS



Optical barriers in compliance with the EN 12445 standard (only for L ≥ 1000 mm)



Gasket (A) and rear thermal break (B) to reduce the door's thermal transmittance



THE GLIDE ISO 26 RAPID ROLL-UP DOOR is an industrial, vertically sliding thermal rapid roll-up door, suitable for installation in cold rooms, mounted on the cold room side. **Thermal transmittance UD = 2.3 W/(m²K).** Standard features include a gasket and rear thermal break.

ADVANTAGES

- ✓ Prevents condensation from forming

APPLICATIONS (ONLY FOR CHILLER TEMPERATURES)

- ✓ Indoors
- ✓ Supermarkets
- ✓ Food sector
- ✓ Ideal for separating the chiller cold room (+4°C) from the sales area



GENERAL TECHNICAL FEATURES



Max dimension	L 3000 x H 2500 mm
Frame	Base and cover in galvanised steel 2.5 mm, painted in RAL 9010 (other colours available on request) <i>opt: GLIDE ISO 26-IX: AISI 304 stainless steel *</i>
Winding shaft	Composite material, Ø 160 mm
Maximum speed	<i>opening: 0.8 m/s</i> <i>closing: 0.6 m/s</i> with acceleration and deceleration ramps
Tarp	PVC-coated tarp sheet with PE foam filling made of polyester fiber, with a total thickness of 26 mm; color as per the "Available RAL Colors" chart. No window
Sliding	Free sliding
Electronics	Motorgear: complete with electromagnetic brake and absolute encoder with cataphoresis coating Motor control: with inverter card on exclusive Incold IP 66 box Control board: exclusive Incold IP 66, with Mylar keyboard and message display Automation power supply: 230 V, 1 phase + Neutral + Earth <i>opt: Remote control with iR/Vos system</i>
Opening	Keypad and emergency push button on external control panel + mushroom push button Ø 90 mm <i>recommended option: collision-avoidance radar with safety function</i>
Wiring	Door supplied pre-wired
Emergency opening	Manual handle <i>opt: Continuity unit (UPS)</i>
Operating temperature	Temperature difference between the two rooms = max 20°C; not suitable for separating chiller and freezer environments. Always check the humidity level

* Versions on the next page

AVAILABLE COLOUR/RAL STANDARD

1003	1021	5010	5012	9016	1013
2004	3002	3028	6026	9005	7001
7035	9006	7037	7038		

DIMENSIONS

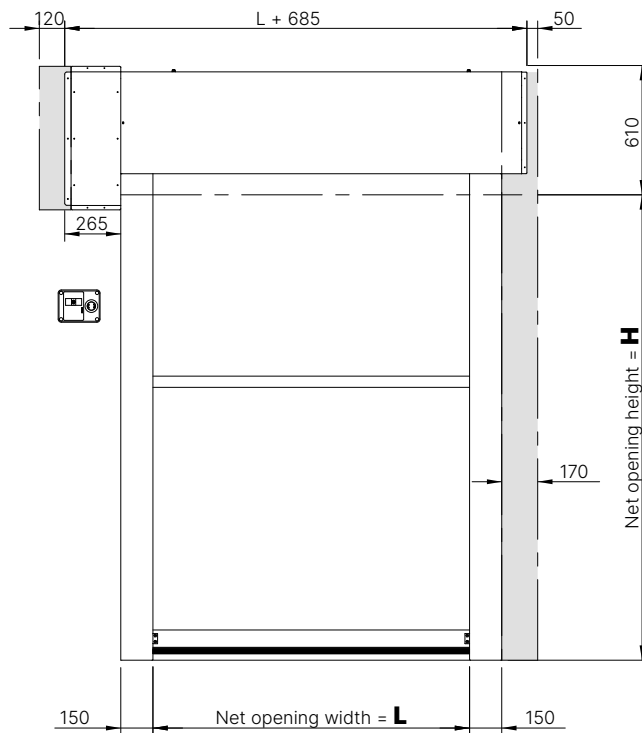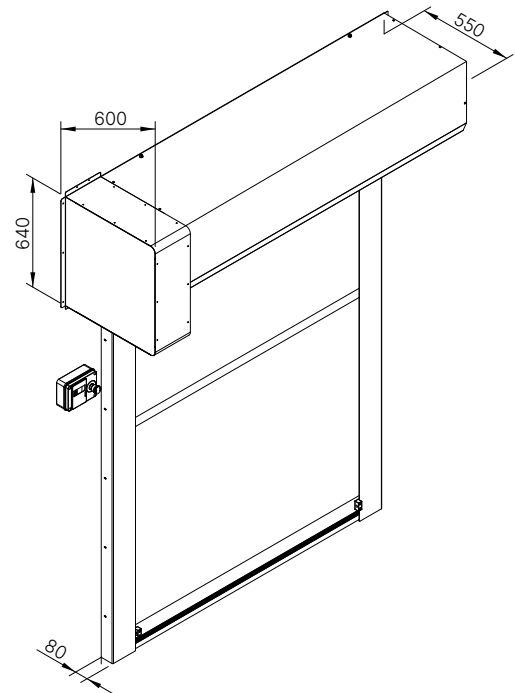

 Extra space for installation/maintenance

OTHER VERSIONS

GLIDE ISO 26-IX

The GLIDE ISO 26-IX rapid roll-up door is a variation of the GLIDE ISO 26, designed for the food sector and aggressive environments. Featuring an Aisi 304 stainless steel frame.

APPLICATIONS

- ✓ Supermarkets
- ✓ Ideal for separating the chiller cold room (+4°C) from the sales area
- ✓ Food sector
- ✓ Aggressive environments

TECHNICAL FEATURES

Frame	Base and cover in AISI 304 stainless steel 2 mm thick
-------	---